



Fig.1

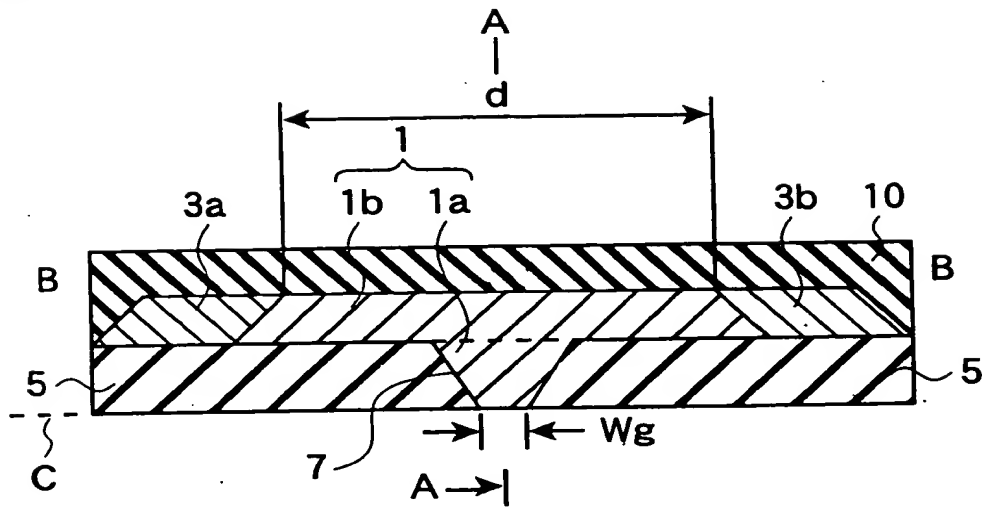


00038541-002701  
F042800-4-980000

Fig.2

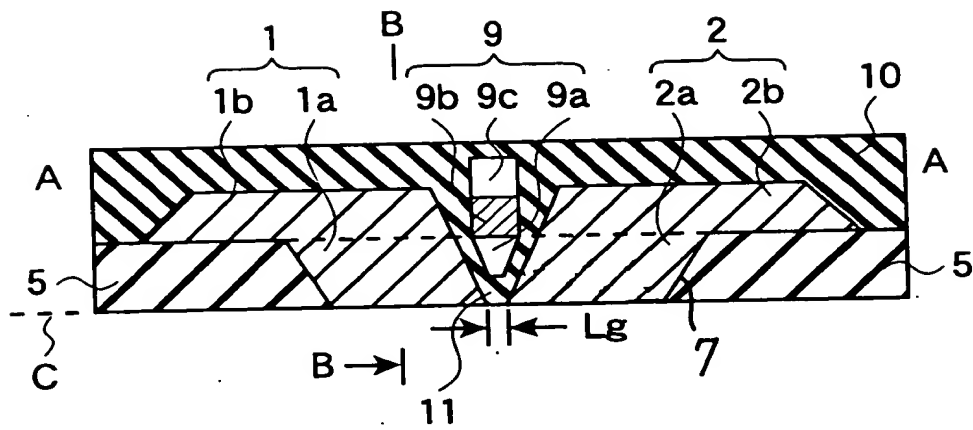

00038541.082704  
T02280 TT982660


Fig.3

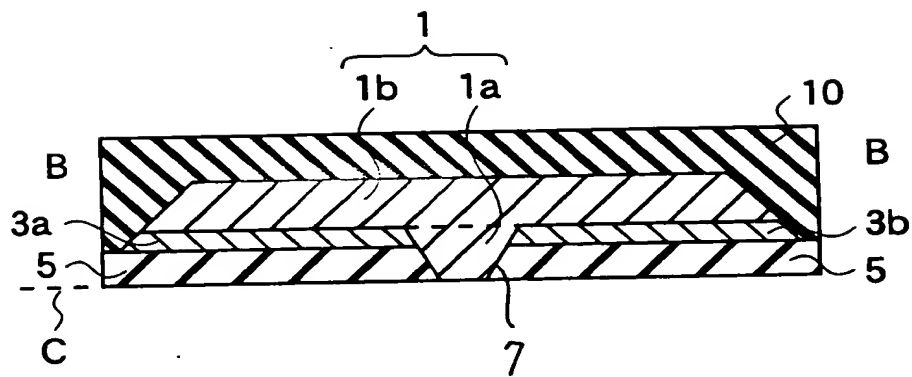

00938511.002701




Fig.5

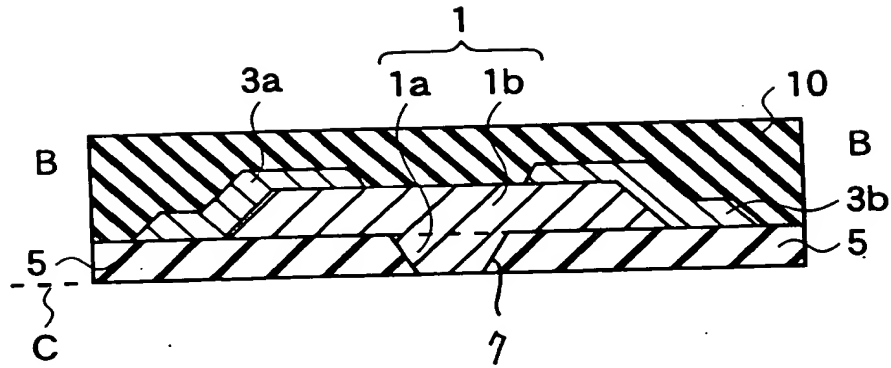


09938641.002704

Fig.6







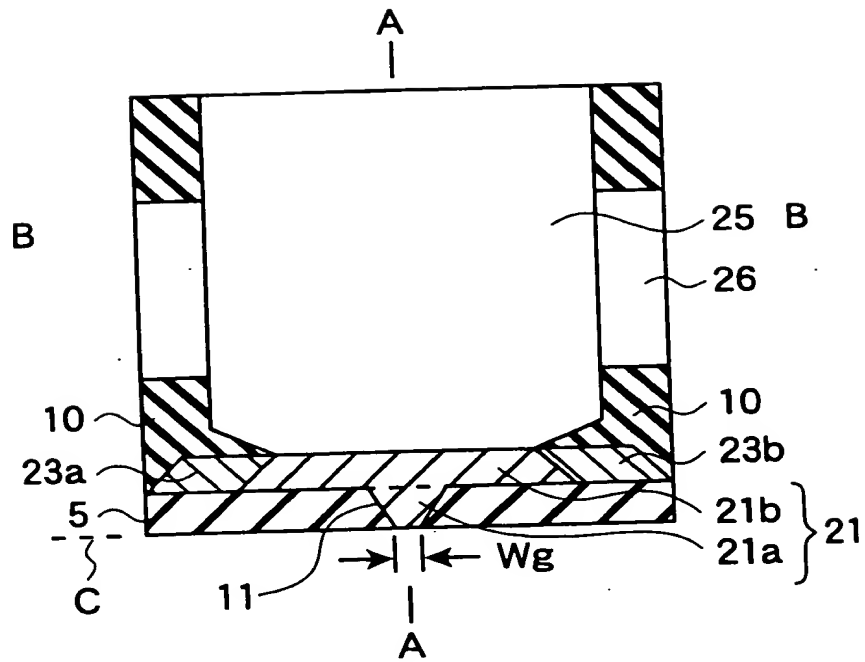


09938614.092704

Fig.7

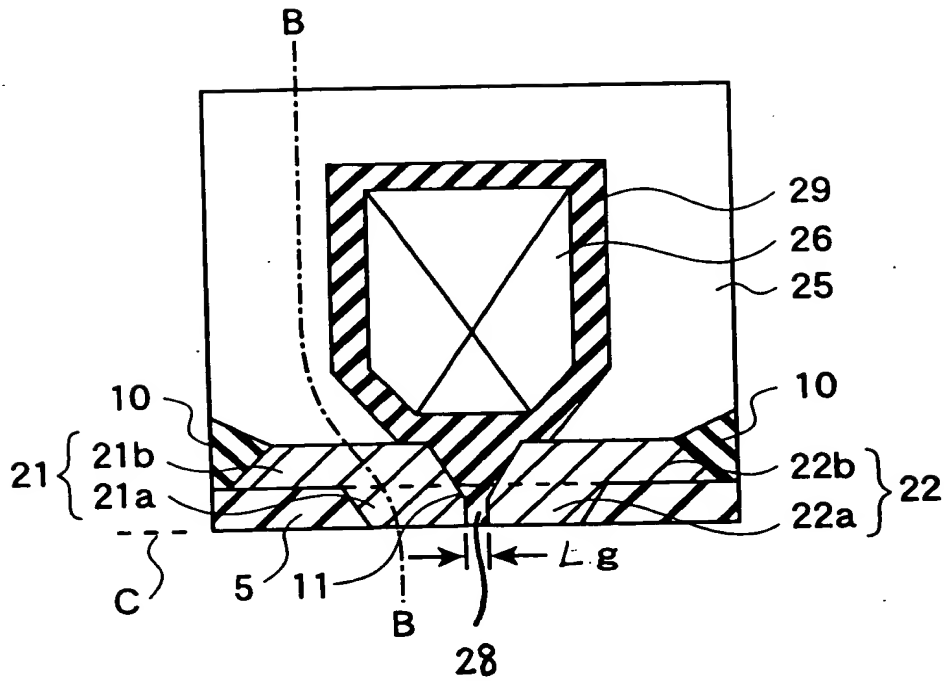


09938641.082704

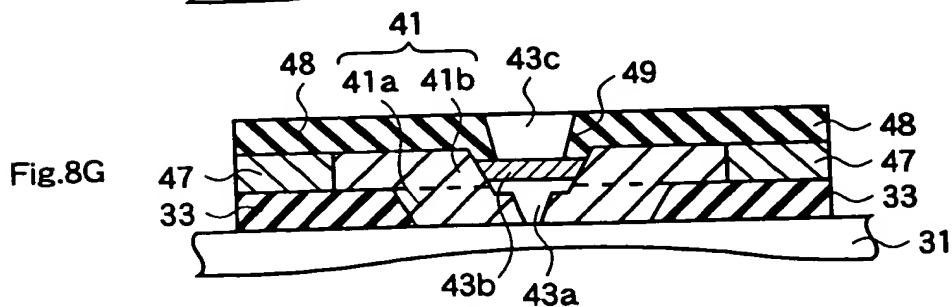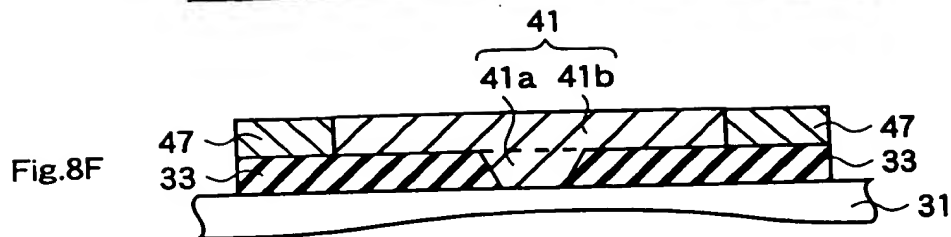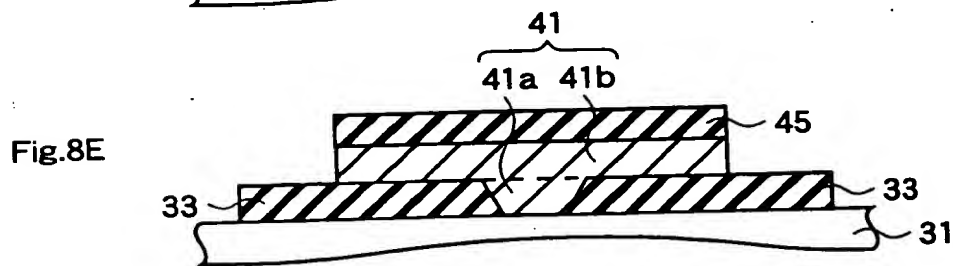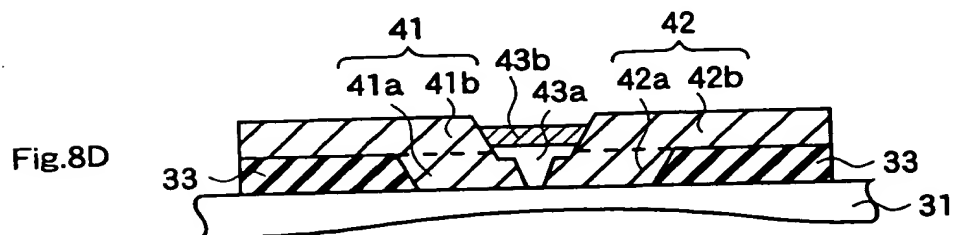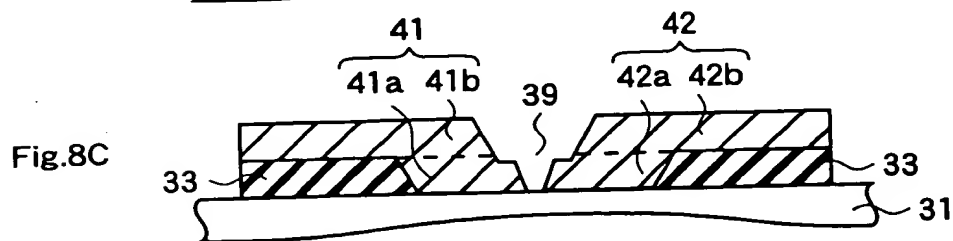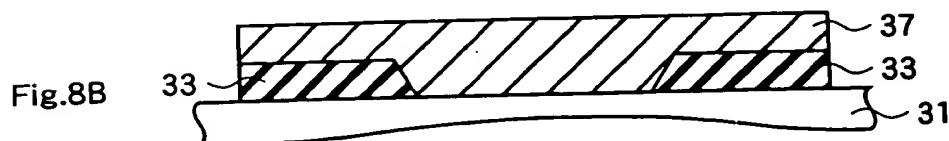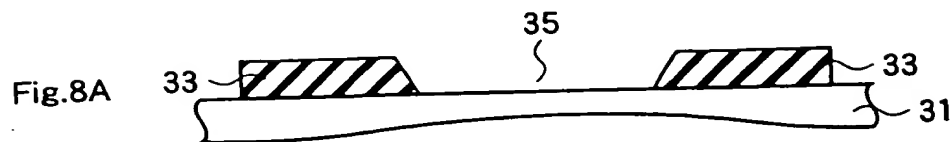

09939641.082704



Fig.9

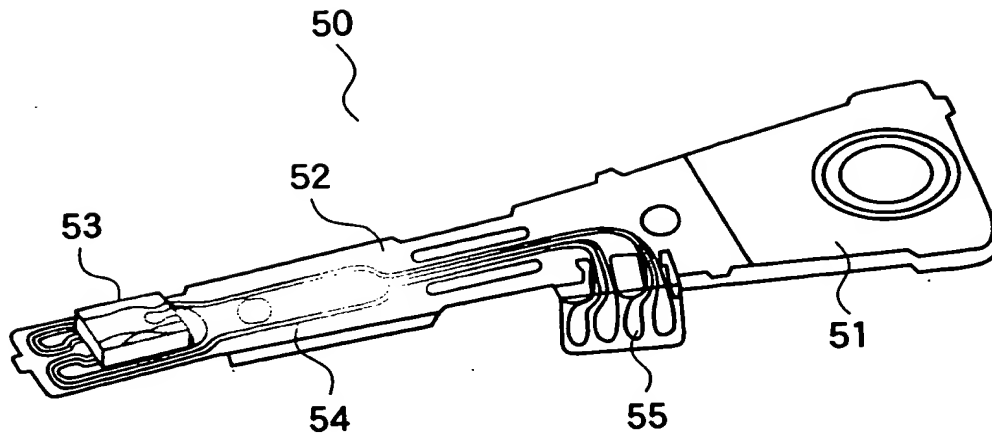

00000001-00000001

This diagram shows an exploded perspective view of a disk drive assembly. The upper component is a top cover (60) with a circular opening for the disk. The lower component is a base assembly (63) containing a disk (51) mounted on a spindle (52). The disk (51) has a central hub (61) and a read/write head (53) positioned above it. A motor (62) is also visible. The base assembly (63) includes various mounting features and a side flange (64). Dashed lines indicate the alignment and assembly path of the components.